



ASM AUDIO

2023-2024
PRODUCT CATALOG

NINGBO ASM ELECTRONICS TECHNOLOGY CO., LTD

PROFILE

Established In 2001, **NINGBO ASM ELECTRONICS TECHNOLOGY** Pro & Car Audio Speakers manufacturer, has become one of the largest companies specialized In Subwoofer, Car speakers, Tweeter, Speaker systems, Boom box, professional sound systems, and other audio accessories.

As an audio equipment manufacturer with an area of 1500sq.m., 6 production lines (2 lines for car audio systems, 2 lines for professional audio systems, 2 lines for relevant audio accessories), over 100 employees, and the certificate of ISO9001:2000 system, we still keep specialized in R&D, sales, and OEM/ODM services. Until 2016 Year, 75-95% of our products export to overseas markets, such as the United States, Europe, Middle-east, and South America etc.

More than 10 years was a glorious time for ASM, but ASM will certainly make greater achievements in the future international market competition.

Ningbo ASM promises to offer his best services to his customers forever.

The View Of ASM factory:



PRODUCT LINE



LITEN ROOM



OFFICE ROOM



TEST ROOM



WAREHOUSE



WAREHOUSE

WHY CHOOSE US

✓ NO MOQ Request

We welcome any of your sample order to test our product quality.

✓ Competitive Price

High quality with reasonable prices

✓ Developing Speed & Lead Time

Fast developing speed and short lead times

✓ QC

Very Accurate, 1 % failure Rate.

✓ Professional Team

Years of cooperation experiences with world famous brands, fluent communication with clients

✓ Long History

Established in 2001, 10+ years of audio products experience.



ASM Audio

MENU

Diligence

Innovation

Excellence

SUBWOOFER

Titan	02
Elite X	03
Elite	04-05
S-Entry	06-08
S-Shallow	09

COAXIAL SPEAKER

Hp - X	11-12
C-Coax	13-14
AC-Coax	15
HP - G	16

MIDRANGE SPEAKERS

F - Pro	18
M - Pro	19
P - Pro	20
DX	21
Sed Plus	22-23
Colorful	24


COMPONENT SET

Hp Com	26
Cp Com	27
Pro Com	28

TWEETER

Tw	30-31
Htw	32
BOX VEB/SWB	33

SUBWOOFER

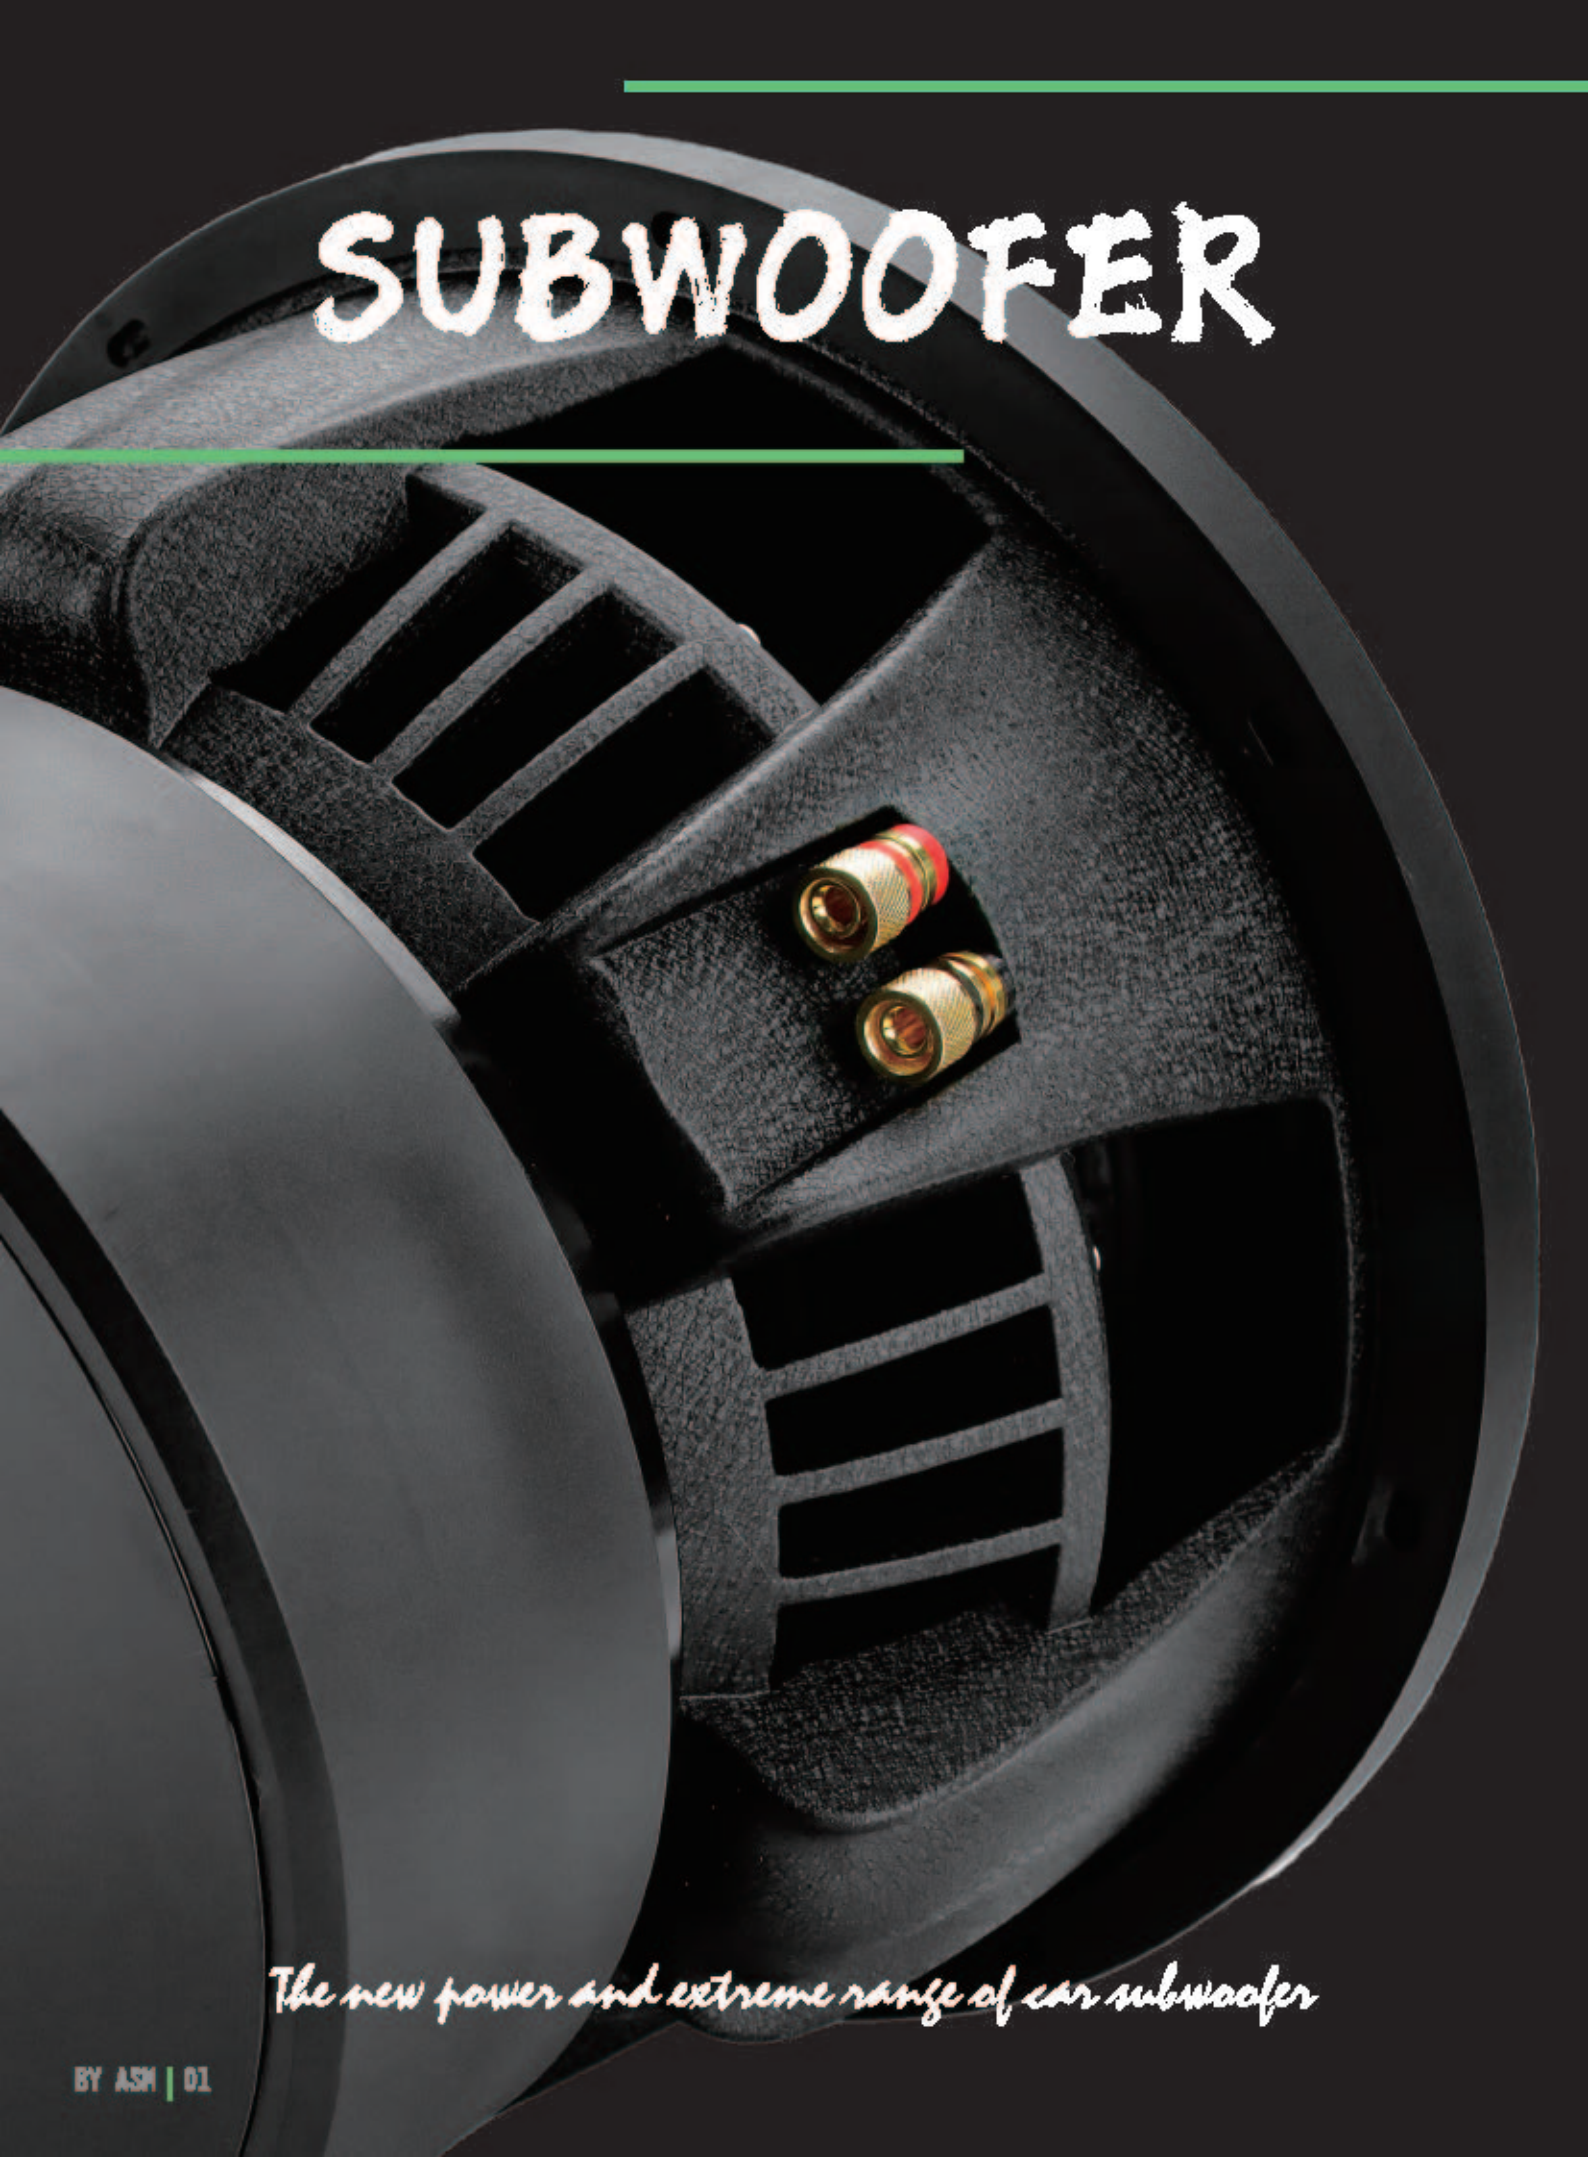

The new power and extreme range of car subwoofer

TITAN SERIES

The TITAN is our top of the line SUBWOOFER production series. Built with a large flat wound 4" 8-Layer Voice Coil and 6 layer high excursion spiders, A surgically cut custom cast aluminum frame and Triple stacked strontium magnet, take up to 10000 Watts of peak power!



12" 8000 WATTS
MAX POWER

15" 10000 WATTS
MAX POWER

FEATURES:

- Heavy duty die-cast aluminum basket with Carbon fiber painted
- High big roll foam surround with stitching
- Extremely strong 100% Carbon fiber pressed cone
- 10" O.D. Spaced 6 layer Spider Suspension
- Protective magnet cover
- Dome Carbon fiber dust cover

SPECIFICATIONS

General Data	TITAN 315.2V4D2	TITAN 312.2V4D2
Structure	15" (380mm)	12" (304mm)
Nominal Power Handling	5000 Watts	4000 Watts
Maximum Power	10000 Watts	8000 Watts
Sensitivity	93 dB	91 dB
Frequency Response	38-900Hz	45-1.2KHz
Electrical Data		
Nominal Impedance	2+2/1+1 Ohm	2+2/1+1 Ohm
Voice Coil and Magnet Parameters		
Voice Coil Diameter	4" BASV	4" BASV
Voice Coil welding Height	77mm	77mm
Number of Layers	8 Layer Flat Alu	8 Layer Flat Alu
Magnetic Size	3pcs 280x20mm, Y35	3pcs 280x20mm, Y35



SUBWOOFER

ELITE X SERIES

12" 5000 WATTS
MAXPOWER

15" 6000 WATTS
MAXPOWER



FEATURES:

- Heavy duty die-cast aluminum basket
- Big roll foam surround with stitching
- Extremely Non-pressed cone
- 3.0" 4 Layer HI-temp copper voice coil with Black Aluminum former
- 10" O.D. Spaced 4 layer Spider Suspension
- Protective magnet cover
- Rubber gasket trim ring
- Stronger paper dust cover

SPECIFICATIONS

General Data	ELE-X 315.2V3D2	ELE-X 312.2V3D2
Structure	15" (380mm)	12" (304mm)
Nominal Power Handling	3000 Watts	2500 Watts
Maximum Power	6000 Watts	5000 Watts
Sensitivity	92 dB	90 dB
Frequency Response	42-1.1KHz	46-1.5KHz
Electrical Data		
Nominal Impedance	2+2/1+1 Ohm	2+2/1+1 Ohm
Voice Coil and Magnet Parameters		
Voice Coil Diameter	Φ76.2 mm	Φ76.2 mm
Voice Coil welding Height	60mm	60mm
Voice Coil Robbin	Black Aluminum	Black Aluminum
Voice Coil wire material	4 Layer Copper	4 Layer Copper
Magnetic Size	3pcs 220x20mm,Y35	3pcs 220x20mm,Y35

ELITE SERIES

FEATURES:

- Heavy duty die-cast aluminum basket
- High roll foam surround with stitching
- Carbon fiber enhanced non-pressed paper cone
- 3" 4 Layer Hi-temp copper voice coil with Black Aluminum former
- 8" O.D. 2 layer Spider Suspension
- Protective magnet cover
- Rubber gasket trim ring
- Carbon fiber enhanced paper dust cover



10" 1600 WATTS
MAX POWER

12" 2400 WATTS
MAX POWER

15" 3000 WATTS
MAX POWER



SPECIFICATIONS

General Data	ELE 215.2V3D2	ELE 212.2V3D2	ELE 210.2V2.5D2
Structure	15" (380mm)	12" (304mm)	10" (250mm)
Maximum Power	3000 Watts	2400 Watts	1600 Watts
Nominal Power Handling	1500 Watts	1200 Watts	800 Watts
Sensitivity	90 dB	89 dB	89 dB
Frequency Response	38-1.7KHz	39-1.2KHz	42-1.2KHz
Electrical Data			
Nominal Impedance	2+2/1+1 Ohm	2+2/1+1 Ohm	2+2/1+1 Ohm
Voice Coil and Magnet Parameters			
Voice Coil Diameter	Φ76.2 mm	Φ76.2 mm	Φ63.5 mm
Voice Coil welding Height	50mm	50mm	50mm
Wire of material	4 Layer Copper	4 Layer Copper	4 Layer Copper
Magnetic Size	3pcs 180x20mm,Y35	3pcs 180x20mm,Y35	3pcs 180x20mm,Y35

ELITE SERIES

FEATURES:

- Stamped Steel frame
- High roll foam surround with stitching
- Carbon fiber enhanced non-pressed paper cone
- 2.5" 4 Layer HI-temp copper voice coil with Black Aluminum former
- 2 layer Spider Suspension
- Protective magnet cover
- Rubber gasket trim ring
- Paper dust cover



10" 1000 WATTS
MAX POWER

12" 1800 WATTS
MAX POWER

15" 2000 WATTS
MAX POWER

SPECIFICATIONS

General Data	ELE 215.2V2.5D4	ELE 212.2V2.5D4	ELE 210.2V2D4
Structure	15" (380mm)	12" (304mm)	10" (250mm)
Maximum Power	2000 Watts	1800 Watts	1000 Watts
Nominal Power Handling	1000 Watts	900 Watts	500 Watts
Sensitivity	91 dB	90 dB	89 dB
Frequency Response	35-3.6KHz	40-4.0KHz	44-4.5KHz
Electrical Data			
Nominal Impedance	4+4 Ohm	4+4 Ohm	4+4 Ohm
Voice Coil and Magnet Parameters			
Voice Coil Diameter	Φ63.5 mm	Φ63.5 mm	Φ50.5 mm
Voice Coil welding Height	35mm	35mm	35mm
Wire of material	4 Layer Copper	4 Layer Copper	4 Layer Copper
Magnetic Size	2pcs 156x20mm,Y35	2pcs 156x20mm,Y35	2pcs 140x20mm,Y35

S-ENTRY SERIES



8" 400 WATTS
MAX POWER



12" 700 WATTS
MAX POWER

10" 500 WATTS
MAX POWER

15" 1000 WATTS
MAX POWER

FEATURES:

- Stamped Steel frame
- Rubber surround with stitching
- Pressed paper cone

- 2" 4 Layer HI-temp copper voice coil
- Protective magnet cover
- Rubber gasket trim ring
- Paper dust cover

SPECIFICATIONS

General Data	SE 15.1V2D4	SE 12.1V2D4	SE 10.1V2D4	SE 8.1V2D4
Structure	15" (380mm)	12" (300mm)	10" (250mm)	8" (205mm)
Nominal Power Handling	500 Watts	350 Watts	250 Watts	200 Watts
Maximum Power	1000 Watts	700 Watts	500 Watts	400 Watts
Sensitivity	90 dB	89 dB	88 dB	88 dB
Frequency Response	39-900Hz	45-1.2KHz	50-1.4KHz	52-1.4KHz
Electrical Data				
Nominal Impedance	4 Ohm	4 Ohm	4 Ohm	4 Ohm
Voice Coil and Magnet Parameters				
Voice Coil Diameter	2" BASV	2" BASV	2" BASV	2" BASV
Voice Coil winding Height	25mm	25mm	25mm	25mm
Number of Layers	4 Layer	4 Layer	4 Layer	4 Layer
Magnetic Size	156x20mm, Y30	140x20mm, Y30	130x20mm, Y30	130x20mm, Y30

S-ENTRY SERIES



10" 700 WATTS
MAX POWER



12" 1000 WATTS
MAX POWER

FEATURES:

- Stamped Steel frame
- Dual rubber surround with stitching
- Non-pressed paper cone
- 2" 4 Layer HI-temp copper voice coil
- Protective magnet cover
- Rubber gasket trim ring
- Carbon fiber enhanced paper dust cover

SPECIFICATIONS

General Data	SE 12.2V2D4	SE 10.2V2D4
Structure	12" (300mm)	10" (250mm)
Nominal Power Handling	500 Watts	350 Watts
Maximum Power	1000 Watts	700 Watts
Sensitivity	91 dB	90 dB
Frequency Response	46-1.2KHz	49-1.4KHz
Electrical Data		
Nominal Impedance	4 Ohm	4 Ohm
Voice Coil and Magnet Parameters		
Voice Coil Diameter	2" BASV	2" BASV
Voice Coil welding Height	30mm	30mm
Number of Layers	4 Layer	4 Layer
Magnetic Size	156x25mm, Y30	140x20mm, Y30

S-ENTRY SERIES



10" 900 WATTS
MAX POWER

FEATURES:

- Stamped Steel frame
- Foam surround with stitching
- Pressed paper cone



12" 1200 WATTS
MAX POWER

- 2" 4 Layer Hi-temp copper voice coil
- Protective magnet cover
- Rubber gasket trim ring
- Paper dust cover

SPECIFICATIONS

General Data	SE-X.12.1V2D4	SE-X10.1V2D4
Structure	12" (380mm)	10" (304mm)
Nominal Power Handling	800 Watts	450 Watts
Maximum Power	1200 Watts	900 Watts
Sensitivity	91 dB	90 dB
Frequency Response	43-1.2KHz	48-1.4KHz
Electrical Data		
Nominal Impedance	4 Ohm	4 Ohm
Voice Coil and Magnet Parameters		
Voice Coil Diameter	2" BASV	2" BASV
Voice Coil welding Height	25mm	25mm
Number of Layers	4 Layer	4 Layer
Magnetic Size	156x25mm, Y30	140x20mm, Y30

SUBWOOFER

S-SHALLOW SERIES



SPECIFICATIONS

General Data	SW-S.12.2V2D2	SW-S 10.2V1.5D2	SW-S 8.2V1.5D2
Structure	12" (300mm)	10" (250mm)	8" (200mm)
Nominal Power Handling	350 Watts	250 Watts	180 Watts
Maximum Power	700 Watts	500 Watts	360 Watts
Sensitivity	91 dB	90 dB	90 dB
Frequency Response	43-1.2KHz	48-1.4KHz	51-1.4KHz
Electrical Data			
Nominal Impedance	2+2 Ohm	2+2 Ohm	2+2 Ohm
Voice Coil and Magnet Parameters			
Voice Coil Diameter	2" BASV	1.5" BASV	1.5" BASV
Voice Coil winding Height	25mm	20mm	20mm
Number of Layers	4 Layer	4 Layer	4 Layer
Magnetic Size	156x20mm, Y30	140x20mm, Y30	140x20mm, Y30



12" 1200 WATTS
MAX POWER

FEATURES:

- Ultra Thin Stamped Steel Frame Design
- Foam surround
- Pressed paper cone
- 2" 4 Layer HI-temp copper voice coil
- Protective magnet cover
- Rubber gasket trim ring
- Paper dust cover



A new extended range of performance coaxial speaker for car

COAXIAL SPEAKER

COAXIAL SPEAKERS

HP-X SERIES

The HP-X SERIES is our new line series

2-Way Coaxial Speakers with Carbon Fiber Cones and 25mm Silk Dome Tweeters.



NEW

FEATURES:

- Lightweight Carbon Fiber cone
- Rubber speaker surround
- 1" Silk Dome tweeters
- Woven tinsel leads
- Ferrite magnet motor structure
- OEM magnet stickers

HP-X 690-2A

6x9" 2-Way Coaxial Speakers with Carbon Fiber Cones

750 WATTS
MAX POWER

STAMP STEEL

IP52
WEATHER RESISTANT

Structure: 6x9"
Nominal Power Handling: 250 Watts
Maximum Power: 750Watts
Sensitivity: 92 dB
Frequency Response: 38-21kHz
Nominal Impedance: 4Ω
Voice Coil: 1.25"ASV
Magnetic Size: 110x18mm Y35



COAXIAL SPEAKERS

HP-X SERIES

HP-X 650-2A

480 WATTS
MAX POWER

NEW



Structure: 6.5" (165mm)
Nominal Power Handling: 160 Watts
Maximum Power: 480Watts
Sensitivity: 92 dB
Frequency Response: 40-21kHz
Nominal Impedance: 4 Ω
Voice Coil: 1"ASV
Magnetic Size: 110x15mm Y35

STAMP STEEL

IP52
WEATHER RESISTANT

Structure: 6.5" (165mm)
Nominal Power Handling: 160 Watts
Maximum Power: 480Watts
Sensitivity: 92 dB
Frequency Response: 40-21kHz
Nominal Impedance: 4 Ω
Voice Coil: 1"ASV
Magnetic Size: 110x15mm Y35

HP-X 525-2A

360 WATTS
MAX POWER



HP-X 400-2A

240 WATTS
MAX POWER



Structure: 4" (100mm)
Nominal Power Handling: 80 Watts
Maximum Power: 240Watts
Sensitivity: 92 dB
Frequency Response: 80-21kHz
Nominal Impedance: 4 Ω
Voice Coil: 1"ASV
Magnetic Size: 80x12mm Y35

COAXIAL SPEAKERS

C-COAX SERIES

FEATURES:

- paper cone
- Foam speaker surround
- Woven tinsel leads
- Ferrite magnet motor structure
- OEM magnet stickers

C-COAX 690-B

540 WATTS
MAX POWER



C-COAX 570-B

300 WATTS
MAX POWER



C-COAX 650-B

300 WATTS
MAX POWER



SPECIFICATIONS

General Data	C-690-B	C-650-B	C-570-B
Structure	6x9"	6.5"	5x7"
Nominal Power Handling	180 Watts	100 Watts	100 Watts
Maximum Power	540 Watts	300 Watts	300 Watts
Sensitivity	90 dB	90 dB	90 dB
Frequency Response	38-21KHz	40-21KHz	40-21KHz
Electrical Data			
Nominal Impedance	4Ω	4Ω	4Ω
Voice Coil and Magnet Parameters			
Voice Coil	1.25"ASV	1"ASV	1"ASV
Magnetic Size	80x15mm,Y25	70x12mm,Y25	70x10mm,Y25

C-COAX SERIES

COAXIAL SPEAKERS

C-COAX 525-B

240 WATTS
MAX POWER



C-COAX 460-B

240 WATTS
MAX POWER



C-COAX 400-B

180 WATTS
MAX POWER



C-COAX 300-B

100 WATTS
MAX POWER



SPECIFICATIONS

General Data	C-525-B	C-400-B	C-460-B	C-300-B
Structure	5.25"	4"	4x6"	3"
Nominal Power Handling	80 Watts	80 Watts	80 Watts	50 Watts
Maximum Power	240 Watts	180 Watts	240 Watts	100 Watts
Sensitivity	90 dB	90 dB	90 dB	90 dB
Frequency Response	55-21KHz	80-21KHz	55-21KHz	100-21KHz
Electrical Data				
Nominal Impedance	4Ω	4Ω	4Ω	4Ω
Voice Coil and Magnet Parameters				
Voice Coil	1"ASV	0.75"ASV	1"ASV	0.75"ASV
Magnetic Size	70x10mm,Y25	80x10mm,Y25	70x10mm,Y25	80x10mm,Y25

COAXIAL SPEAKERS

AC-COAX SERIES

AC-COAX 690

360 WATTS
MAX POWER



AC-COAX 650

240 WATTS
MAX POWER



AC-COAX 525

180 WATTS
MAX POWER



AC-COAX 400

150 WATTS
MAX POWER



- Mimics Glass Fiber Plastic cone
- Rubber speaker surround • Flare tweeters

SPECIFICATIONS

General Data	AC-COAX 690	AC-COAX 650	AC-COAX 525	AC-COAX 400
Structure	6x9	6.5" (165mm)	5.25" (130mm)	4" (100mm)
Nominal Power Handling	120 Watts	80 Watts	60 Watts	40 Watts
Maximum Power	360 Watts	240 Watts	180 Watts	120 Watts
Sensitivity	90 dB	90 dB	90 dB	90 dB
Frequency Response	38-21KHz	40-21KHz	55-21KHz	80-21KHz
Electrical Data				
Nominal Impedance	4Ω	4Ω	4Ω	4Ω
Voice Coil and Magnet Parameters				
Voice Coil wire material	1.25ASV	1"ASV	0.75"ASV	0.75"ASV
Magnetic Size	80x15mm Y25	70x12mm Y25	70x10mm Y25	60x10mm Y25

COAXIAL SPEAKERS

HP-G SERIES



FEATURES:

- Glass fiber cone
- Rubber speaker surround
- 1" tweeters
- Woven tinsel leads
- Ferrite magnet motor structure
- OEM magnet stickers

HP-G690-2

6x9 Inch 600 WATTS MAX. POWER

Structure: 6x9"
Nominal Power Handling: 200 Watts
Maximum Power: 600 Watts
Sensitivity: 91 dB
Frequency Response: 38-21kHz
Nominal Impedance: 4Ω
Voice Coil: 1.25"ASV
Magnetic Size: 110*15mm Y35



HP-G650-2

6.5 Inch 600 WATTS MAX. POWER

Structure: 6.5" (165mm)
Nominal Power Handling: 120 Watts
Maximum Power: 360 Watts
Sensitivity: 91 dB
Frequency Response: 40-21kHz
Nominal Impedance: 4Ω
Voice Coil: 1"ASV
Magnetic Size: 80*15mm Y35



HP-G525-2

5.25 Inch 600 WATTS MAX. POWER

Structure: 5.25" (130mm)
Nominal Power Handling: 100 Watts
Maximum Power: 300 Watts
Sensitivity: 91 dB
Frequency Response: 55-21kHz
Nominal Impedance: 4Ω
Voice Coil: 1"ASV
Magnetic Size: 70*12mm Y35




HP-G400-2

4 Inch 600 WATTS MAX. POWER

Structure: 4" (100mm)
Nominal Power Handling: 70 Watts
Maximum Power: 210 Watts
Sensitivity: 91 dB
Frequency Response: 60-21kHz
Nominal Impedance: 4Ω
Voice Coil: 1"ASV
Magnetic Size: 70*12mm Y35



MIDRANGE SPEAKER

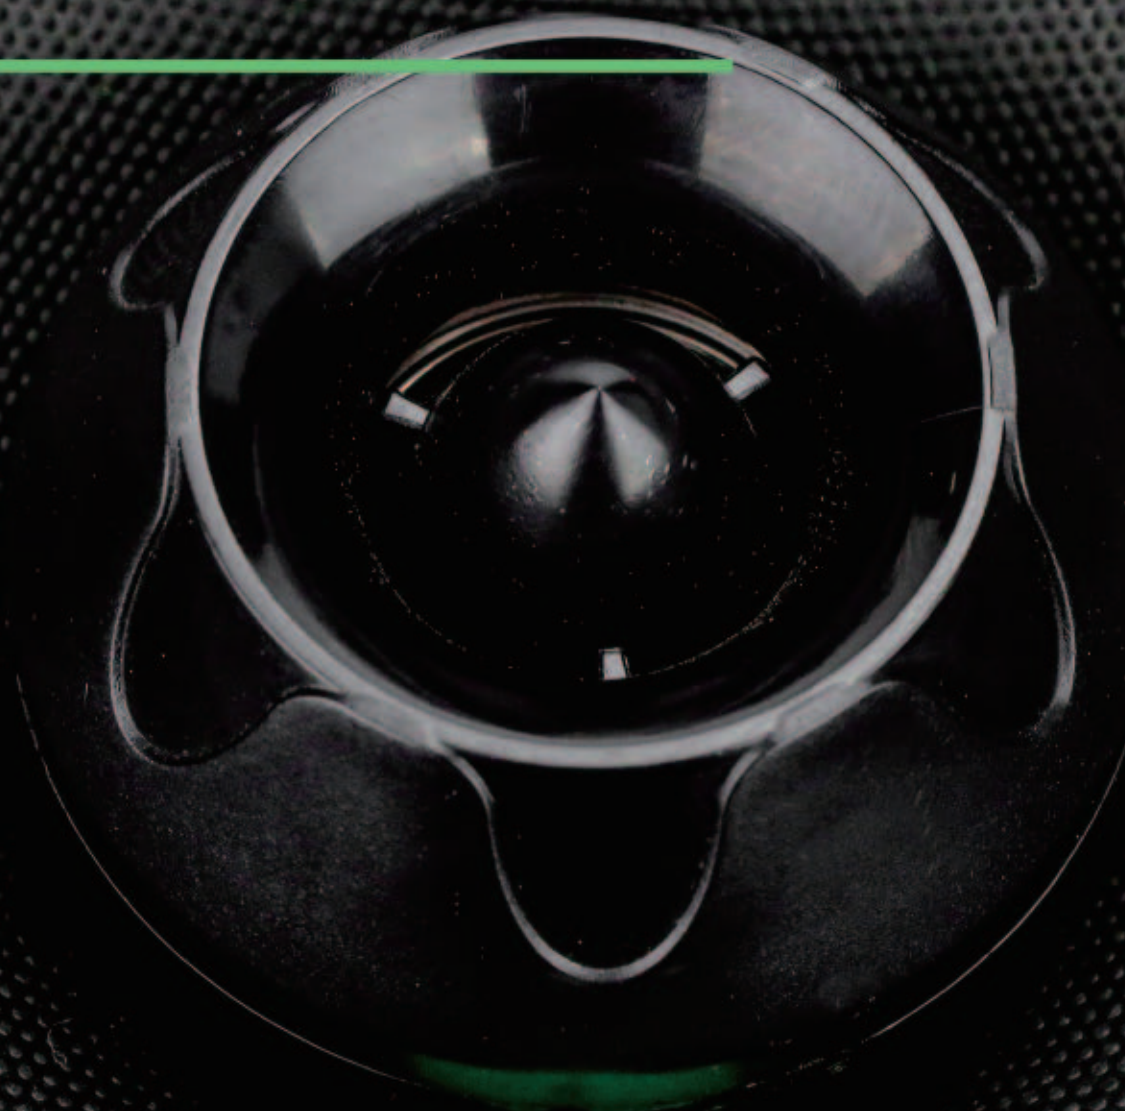

Industry leading pro audio speakers



ASM AUDIO

F-PRO SERIES

MIDRANGE SPEAKERS

STAMP STEEL

660 WATTS
MAX POWER

PRO F690

6x9 Inch Pro Fullrange Speaker

Structure: 6x9"

Nominal Power Handling: 220 Watts

Maximum Power: 660 Watts

Sensitivity: 95 dB

Frequency Response: 60-21kHz

Nominal Impedance: 4Ω

Voice Coil: 1.75"KCCA W 2 Layer Voice Coil

Magnetic Size: 120x20mm Y30



540 WATTS
MAX POWER

PRO F650

6.5 Inch Pro Fullrange Speaker

Structure: 6.5"

Nominal Power Handling: 180 Watts

Maximum Power: 540 Watts

Sensitivity: 95 dB

Frequency Response: 70-21kHz

Nominal Impedance: 4Ω

Voice Coil: 1.5"KCCA W 2 Layer Voice Coil

Magnetic Size: 110x20mm Y30



MIDRANGE SPEAKERS

M-PRO SERIES



PRO M650

6.5 Inch 540 WATTS MAX. POWER

Nominal Power Handling: 180 Watts
Maximum Power: 540 Watts
Sensitivity: 93 dB
Frequency Response: 80-15kHz
Nominal Impedance: 4Ω
Voice Coil: 1.5"KCCA 2 Layer Voice Coil
Magnetic Size: 110x18mm Y35

STAMP STEEL

540 WATTS
MAX POWER

PRO M800

8 Inch 750 WATTS MAX. POWER

Nominal Power Handling: 250 Watts
Maximum Power: 750 Watts
Sensitivity: 94 dB
Frequency Response: 100-15kHz
Nominal Impedance: 4Ω
Voice Coil: 2"KCCA 2 Layer Voice Coil
Magnetic Size: 120x20mm Y35

750 WATTS
MAX POWER



MIDRANGE SPEAKERS

P-PRO SERIES

STAMP STEEL



360 WATTS
MAX POWER

PRO P525

5.25 Inch 360 WATTS MAX. POWER

Nominal Power Handling: 120 Watts

Maximum Power: 360 Watts

Sensitivity: 93 dB

Frequency Response: 140-18kHz

Nominal Impedance: 4 Ω

Voice Coil: 1"KCCA W 2 Layer Voice Coil

Magnetic Size: 90x15mm Y35

480 WATTS
MAX POWER

PRO P650

6.5 Inch 480 WATTS MAX. POWER

Nominal Power Handling: 200 Watts

Maximum Power: 480 Watts

Sensitivity: 93 dB

Frequency Response: 70-18kHz

Nominal Impedance: 4 Ω

Voice Coil: 1.25"KCCA W 2 Layer Voice Coil

Magnetic Size: 120x20mm Y35

900 WATTS
MAX POWER

PRO M800

8 Inch 900 WATTS MAX. POWER

Nominal Power Handling: 300 Watts

Maximum Power: 900 Watts

Sensitivity: 98.8 dB

Frequency Response: 80-11kHz

Nominal Impedance: 4 Ω

Voice Coil: 1.5"KCCA W 2 Layer Voice Coil

Magnetic Size: 120x20mm Y35

1100 WATTS
MAX POWER

PRO M1000

10 Inch 1100 WATTS MAX. POWER

Nominal Power Handling: 350 Watts

Maximum Power: 1100 Watts

Sensitivity: 99.3 dB

Frequency Response: 65-10kHz

Nominal Impedance: 4 Ω

Voice Coil: 2"KCCA W 2 Layer Voice Coil

Magnetic Size: 140x20mm Y35



MIDRANGE SPEAKERS

DX SERIES

DX-690

750 WATTS
MAX POWER

6.9 Inch Midrange Speaker

250 Watts RMS Power
Sensitivity: 92.7 dB
Frequency Response: 75-15KHz
Impedance: 4 Ω
1.5" KCCA W 2 Layer Voice Coil
Magnetic Size: 120x18mm Y35

DX-400

225 WATTS
MAX POWER

4 Inch Midrange Speaker

75 Watts RMS Power
Sensitivity: 91.9 dB
Frequency Response: 140-14KHz
Impedance: 4 Ω
1" KCCA W 2 Layer Voice Coil
Magnetic Size: 80x10mm Y30

DX-525

270 WATTS
MAX POWER

5.25 Inch Midrange Speaker

90 Watts RMS Power
Sensitivity: 92 dB
Frequency Response: 120-18KHz
Impedance: 4 Ω
1" KCCA W 2 Layer Voice Coil
Magnetic Size: 90x15mm Y30

DX-650

360 WATTS
MAX POWER

6.5 Inch Midrange Speaker

120 Watts RMS Power
Sensitivity: 93.8 dB
Frequency Response: 100-15KHz
Impedance: 4 Ω
1" KCCA W 2 Layer Voice Coil
Magnetic Size: 110x18mm Y30

DX-800

900 WATTS
MAX POWER

8 Inch Midrange Speaker

300 Watts RMS Power
Sensitivity: 94.9 dB
Frequency Response: 80-13KHz
Impedance: 4 Ω
1.5" KCCA W 2 Layer Voice Coil
Magnetic Size: 130x20mm Y30

SSD PLUS SERIES



FEATURES:

- Colorful paper cone
- Cloth speaker surround
- Dual dust cap
- Woven tinsel leads
- Ferrite magnet motor structure
- OEM magnet stickers

SSD 6901PLUS

6x9" Midrange Speaker

300 WATTS
MAX POWER

STAMP STEEL

Structure: 6x9"
Nominal Power Handling: 100 Watts
Maximum Power: 300Watts
Sensitivity: 92 dB
Frequency Response: 50-15KHz
Impedance: 4Ω
Voice Coil: 125"ASV 2 Layer Voice Coil
Magnetic Size: 90x15mm Y30



MIDRANGE SPEAKERS

SSD PLUS SERIES

SSD 6501PLUS

240 WATTS
MAX POWER



Structure: 6.5" (165mm)
Nominal Power Handling: 80 Watts
Maximum Power: 240 Watts
Sensitivity: 93 dB
Frequency Response: 60-15kHz
Nominal Impedance: 4 Ω
Voice Coil: 1"ASV 2 Layer Voice Coil
Magnetic Size: 80x10mm Y30

STAMP STEEL

Structure: 6.5" (165mm)
Nominal Power Handling: 80 Watts
Maximum Power: 240 Watts
Sensitivity: 93 dB
Frequency Response: 60-15kHz
Nominal Impedance: 4 Ω
Voice Coil: 1"ASV 2 Layer Voice Coil
Magnetic Size: 80x10mm Y30

SSD 5201PLUS

200 WATTS
MAX POWER



SSD 4001PLUS

130 WATTS
MAX POWER



Structure: 4" (100mm)
Nominal Power Handling: 45 Watts
Maximum Power: 130 Watts
Sensitivity: 93 dB
Frequency Response: 80-15kHz
Nominal Impedance: 4 Ω
Voice Coil: 1"ASV 2 Layer Voice Coil
Magnetic Size: 70x10mm Y30

MIDRANGE SPEAKERS

COLORFUL SERIES



300 WATTS
MAX POWER

FEATURES:

- Colorful Basket
- Cloth Edge And Pressed Paper Cone
- Dust Cap:
- Red Alu. Bullet With Ring
- Plastic colorful bullet
- Paper
- Carbon Fiber
- Silver Alu. Bullet With Ring



ASM colorful series, available in 3",4",4 x 6",5.25",5 x 7",6.5",6x9",8",10" models,
OEM colorful baskets acceptable, OEM dust caps acceptable.

SX COLORFUL 6.5"

6.5" Midrange Speaker

STAMP STEEL

Structure: 6.5" (165mm)
Nominal Power Handling: 120 Watts
Maximum Power: 360 Watts
Sensitivity: 93 dB
Frequency Response: 100-15kHz
Nominal Impedance: 4Ω
Voice Coil: 1"KCCA W 2 Layer Voice Coil
Magnetic Size: 100x15mm Y35





ASH

COMPONENT



The component set line are suitable for either ultimate SPL level or high-end sound quality.

HP COM SERIES

COMEPONET



750 WATTS
MAX POWER

HP 165COM

6.5" 2-way Component System Car Speakers

Woofer:

Peak: 750 watts

Size: 6.5 inch

Voice coil: 1 inch

Ferrite magnet motor structure

Impedance: 4 ohms

Sensitivity: 89 dB

FEATURES:

- Carbon Fiber cone material
- Rubber speaker surround
- 1" Silk Dome Tweeters

STAMP Aluminium

Tweeter:

Peak: 30 watts

Size: 2.0 Inch

Voice coil: 1 inch

Impedance: 4 ohms

Sensitivity: 94 dB



2 WFRS
2 TWEETERS
2 CROSSOVERS

540 WATTS
MAX POWER

CP 165COM

6.5" 2-way Component System Car Speakers

Woofer:

Peak: 540 watts

Size: 6.5 Inch

Voice coil: 1 inch

Ferrite magnet motor structure

Impedance: 4 ohms

Sensitivity: 89 dB



STAMP STEEL

Tweeter:

Peak: 30 watts

Size: 2.0 Inch

Voice coil: 1 inch

Impedance: 4 ohms

Sensitivity: 94 dB

2 WFRS
2 TWEETERS
2 CROSSOVERS



JC COM SERIES

COMEPONET



1000 WATTS
MAX POWER

JC 165COM

6.5" 2-way Component System Car Speakers

Woofer:

Peak: 540 watts

Size: 6.5 inch

Voice coil: 1 inch

Ferrite magnet motor structure

Impedance: 4 ohms

Sensitivity: 89 dB



Tweeter:

Peak: 30 watts

Size: 2.0 inch

Voice coil: 1 inch

Impedance: 4 ohms

Sensitivity: 94 dB



TWEETER



The super tweeters are high powered & high frequency allow for easy in car mounting



TWS 25-01
Neodymium Magnet
1" Silk Dome Tweeter



TWS 25-01
Neodymium Magnet
1" Silk Dome Tweeter



TWS 25-01
Neodymium Magnet
1" Silk Dome Tweeter



PTW 001
1.6" Piezo Tweeter



PTW 002
1.5" Piezo Tweeter



PTW 003
2.5" Piezo Tweeter



PTW 004
2.5" Piezo Tweeter



PTW 005
1.7" Piezo Tweeter



PTW 006
2" Piezo Tweeter



PTW 007
1.6" Piezo Tweeter



PTW 008
2" Piezo Tweeter



PTW 009
2.8" Piezo Tweeter

BULLET TWEETER

TW



TWN 25-01

Neodymium Magnet
1" BULLET SUPER TWEETER



TWN 25-02

Neodymium Magnet
1" BULLET SUPER TWEETER



TWN 25-03

Neodymium Magnet
1" BULLET SUPER TWEETER



TWF 25-01

Ferrite Magnet
1" BULLET SUPER TWEETER



TWF 25-02

Ferrite Magnet
1" BULLET SUPER TWEETER



TWF 25-03

Ferrite Magnet
1" BULLET SUPER TWEETER



TWN 25-04

Neodymium Magnet
1" BULLET SUPER TWEETER




TWF 25-04

Ferrite Magnet
1" BULLET SUPER TWEETER



TWF 38-01

Ferrite Magnet
1.75" BULLET SUPER TWEETER



TWF 38-02

Ferrite Magnet
1.1P BULLET SUPER TWEETER



TWF 44-01

Ferrite Magnet
1.75" BULLET SUPER TWEETER



TWF 44-02

Ferrite Magnet
1.75" BULLET SUPER TWEETER



137x42 TWH

Horn Size: 137 x 42mm Aluminum Tweeter
Voice Coil: 1.5" CCAW
Magnet Weight: 90x18mm
Impedance: 4Ω / 8Ω
Rms Power: 150W
Peak Power: 300W
Frequency response: 1500~20KHZ
Sensitivity: 105db

165x51 TWH

Horn Size: 165 x 51mm Aluminum Tweeter
Voice Coil: 1.5" CCAW
Magnet Weight: 90x18mm
Impedance: 4Ω / 8Ω
Rms Power: 160W
Peak Power: 320W
Frequency response: 1500~20KHZ
Sensitivity: 105db

ALLUMINUM HORN

175x132 TWLH

LONG

FEATURES:

- Power rating: 400 Watts (RMS)
- Impedance: 8 Ohms
- Sensitivity: 96 dB
- Frequency range: 100-20 KHz
- 2" (51mm) Voice Coil
- 1.4" Exit Throat
- Titanium Diaphragm
- High Sensitivity
- 4 Bolt Mounting
- Designed for Mid to High Frequency Reproduction



ENCLOSURE BOX

VEB / SWB SERIES

VEB-2100

2x10" VENTED MDF ENCLOSURE BOX

1.5" BASV 4 Layer Voice Coil
600 Watts RMS Power
1000 Watts Max Power
Sensitivity: 90dB
Impedance: 2+2 Ohm



VEB-2120

2x12" VENTED MDF ENCLOSURE BOX

2" BASV 4 Layer Voice Coil
750 Watts RMS Power
1500 Watts Max Power
Sensitivity: 90dB
Impedance: 2+2 Ohm



VEB-1200

12" VENTED MDF ENCLOSURE BOX

2" BASV 4 Layer Voice Coil
500 Watts RMS Power
1000 Watts Max Power
Sensitivity: 90dB
Impedance: 2+2 Ohm



SWB-SERIES

SHALLOW VENTED MDF ENCLOSURE BOX

SWB 1000

10" SHALLOW SUBWOOFER

1.5" BASV 4 Layer Voice Coil
350 Watts RMS Power
700 Watts Max Power
Sensitivity: 90dB
Frequency Response: 35 - 3.6KHz
Impedance: 2+2 Ohm

SWB 1200

12" SHALLOW SUBWOOFER

2" BASV 4 Layer Voice Coil
500 Watts RMS Power
1000 Watts Max Power
Sensitivity: 90dB
Frequency Response: 30-3.2KHz
Impedance: 2+2 Ohm



[illegible]



NINGBO ASM ELECTRONICS TECHNOLOGY CO., LTD

 Tel: +86(0574) 8608 3358

+86(0574) 8703 7001

 Fax: +86(574) 8703 7005

 E-mail: asm@asm-electronics.com

Add: Lantian Street, Chaohai District, Ningbo (31500), China

For more info, please visit <http://www.asm-electronics.com>

